

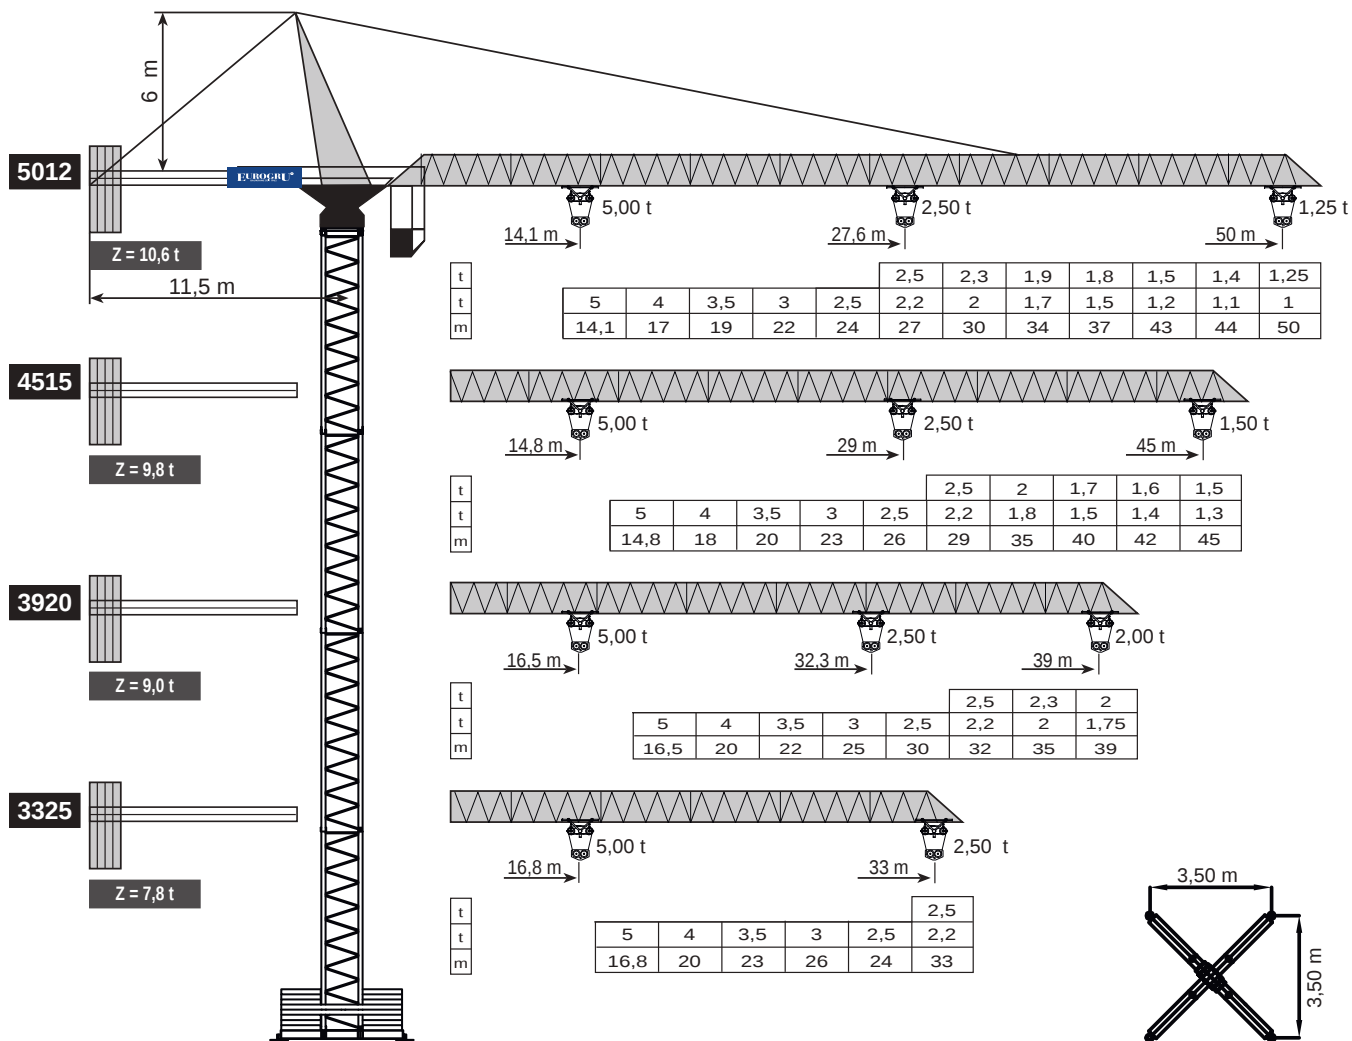
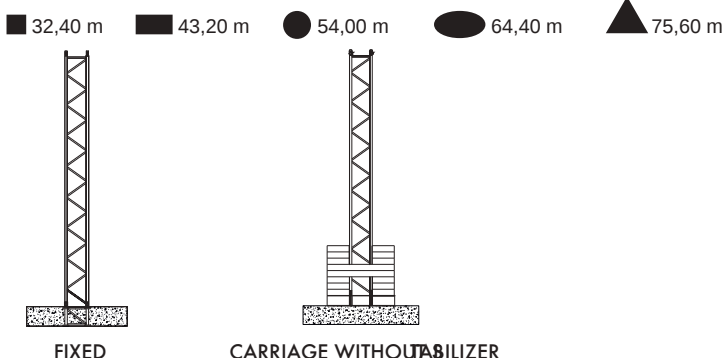


- 1,20 x 1,20 m
- 1,20 x 1,20 m
- 1,40 x 1,40 m
- 1,96 x 1,96 m
- ▲ 2,02 x 2,02 m

H =
TOWER HEIGHT

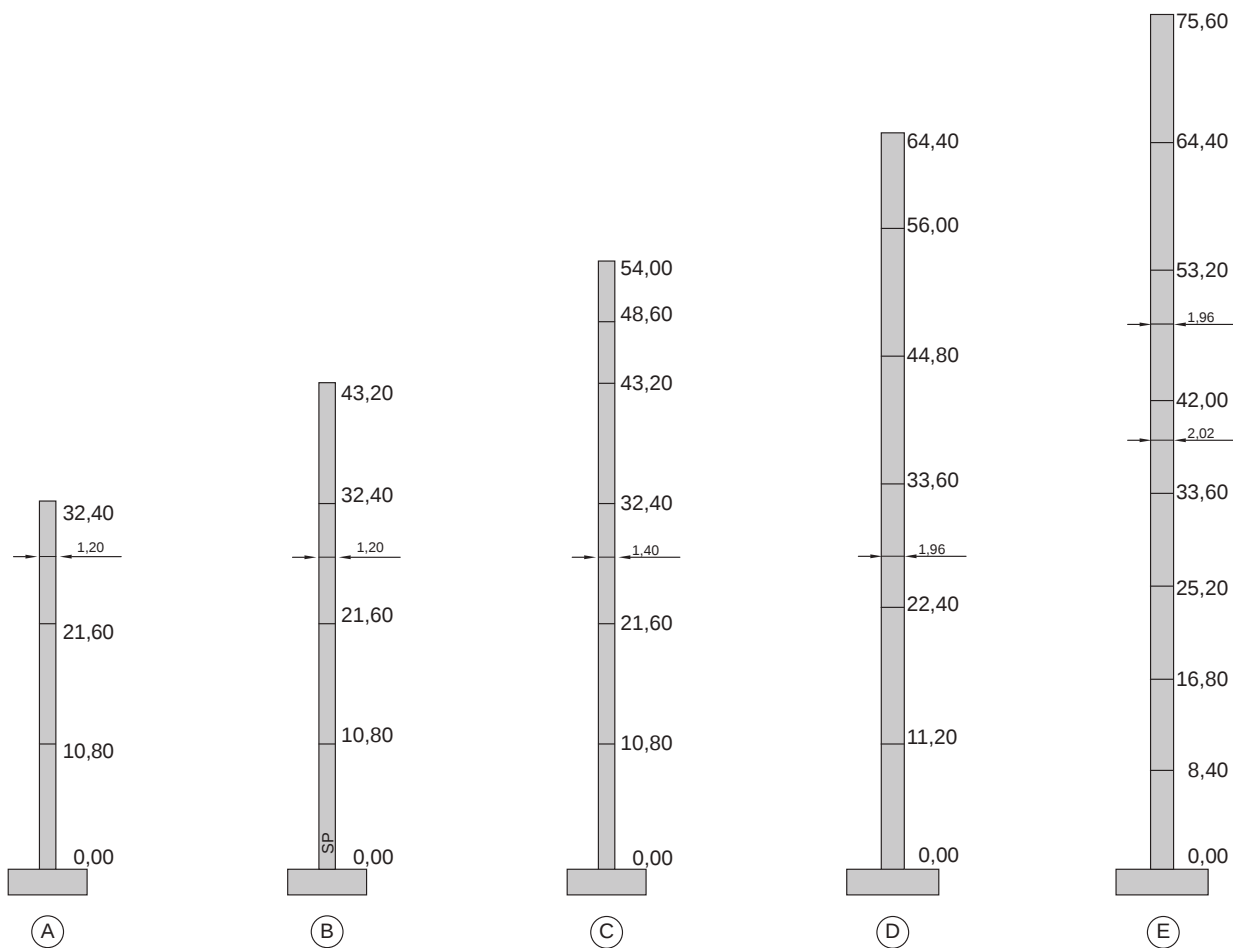



HOISTING WINCHES						
	Hp	m/1'	Kg	Hp	m/1'	Kg
	15	50/25	1250/2500	25	70/35	1250/2500
		25/12	2500/5000		35/17	2500/5000
		5/2,5	2500/5000		8/4	2500/5000

HOISTING SPEED INCREASE MORE THAN 20% WITHOUT LOAD

380/440V 50/60 HZ	WINCH	MAIN SUPPLY	GENER.
	15 HP	18 KVA	36 KVA
	25 HP	31 KVA	55 KVA

	1.3/0.9 KW	25/50 m/1'	R56
	65 Nm	0-0,8 rpm m/1'	ROT. F.

FOR SUPERIOR HEIGHT OF mt 43,20 ADOPTED
5 SPEEDS OF HOISTING

Alle technischen Angaben ohne Gewähr, Irrtümer und Änderungen vorbehalten.
All technical data is without guarantee, errors and changes are reserved.

Am Dornbusch 10
64390 Erzhausen
www.eurogru.de

Telefon: +49 (0) 6150 13440
Fax: +49 (0) 6150 7002
Email: kontakt@eurogru.de

EUROGRU[®]
BAUKRANE SEIT 1962