

HOISTING WINCHES								
	Hp	m/1'	Kg	Kg	Hp	m/1'	Kg	Kg
	40	66/33	2000	4000	50	72/36	2250	4500
		45/22	3000	6000		48/24	3500	7000
		30/15	4000	8000		35/17	4000	8000
		25/12	4000	8000		25/12	4000	8000
	5/2,5	4000	8000	5/2,5	4000	8000		


HOISTING SPEED INCREASE MORE THAN 20% WITHOUT LOAD

380/440V	WINCH	MAIN SUPPLY	GENER.
50/60 HZ			
	40 HP	50 KVA	85 KVA
	50 HP	65 KVA	100 KVA

	3 KW	10/25/50 m/1'	R56
	2x65 Nm	0-0,8 rpm	ROT. F.

- 1 — 1,96 x 1,96 mt
- 2 — 1,91 x 1,91 mt
- 3 — 2,02 x 2,02 mt
- 4 — 2,50 x 2,50 mt

MONOLITIC TOWER VERSION

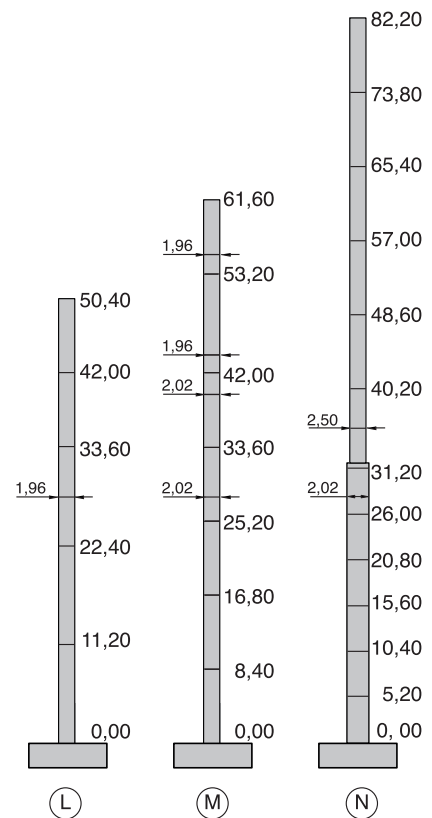

Alle technischen Angaben ohne Gewähr. Irrtümer und Änderungen vorbehalten.
All technical data is without guarantee, errors and changes are reserved.