

HOISTING WINCHES								
	Hp	m/1'	Kg	Kg	Hp	m/1'	Kg	Kg
	75	54/27	4000	8000	100	70/35	4000	8000
		38/19	7000	14000		48/24	7000	14000
		27/13	10000	20000		25/12	10000	20000
		16/8	10000	20000		21/10	10000	20000
		3/1,5	10000	20000		3,5/2	10000	20000


HOISTING SPEED INCREASE MORE THAN 20% WITHOUT LOAD

380/440V 50/60 HZ	WINCH	MAIN SUPPLY	GENER.
	75 HP	100 KVA	130 KVA
	10 HP	130 KVA	150 KVA

	7,5 KW	40/20/5 m/1	R 40
	3 x 65 Nm	0-0,8 rpm	ROT. F.
	R 90	25/50 m/min	4x 35/35 Nm

1 — 2,02 x 2,02 mt
2 — 2,70 x 2,70 mt

MONOLITIC TOWER VERSION

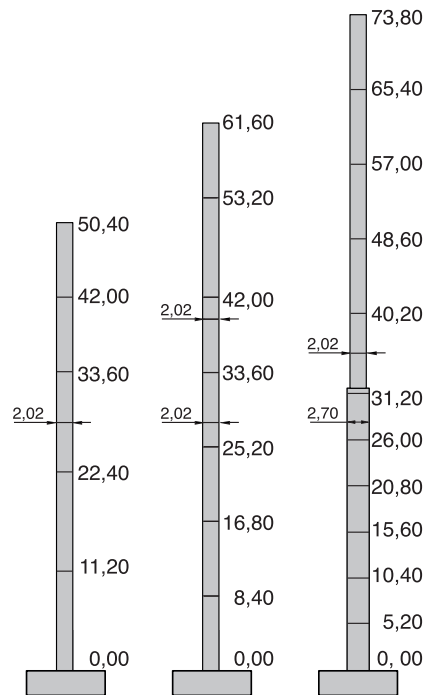

Alle technischen Angaben ohne Gewähr. Irrtümer und Änderungen vorbehalten.
All technical data is without guarantee, errors and changes are reserved.