





HOISTING WINCHES								
	Hp	m/1'	Kg	Kg	Hp	m/1'	Kg	Kg
	50	66/33	2000	4000	60	72/36	2250	4500
		45/22	3000	6000		48/24	3500	7000
		30/15	4000	8000		35/17	4000	8000
		25/12	4000	8000		25/12	4000	8000
		5/2,5	4000	8000		5/2,5	4000	8000


HOISTING SPEED INCREASE MORE THAN 20% WITHOUT LOAD

380/440V	WINCH	MAIN SUPPLY	GENER.
50/60 HZ	40 HP	18 KVA	36 KVA
	50 HP	31 KVA	55 KVA

	4 KW	10/25/50 m/1'	R56
	2x65 Nm	0-0,8 rpm m/1'	ROT. F.

- 1 - 1,96 x 1,96 mt
- 2 - 1,91 x 1,91 mt
- 3 - 2,02 x 2,02 mt
- 4 - 2,50 x 2,50 mt

MONOLITIC TOWER VERSION

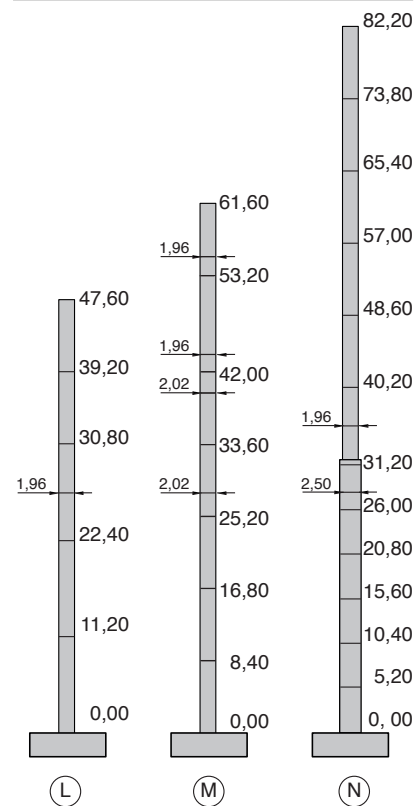

Alle technischen Angaben ohne Gewähr. Irrtümer und Änderungen vorbehalten.  
All technical data is without guarantee, errors and changes are reserved.